


LANNOX-1076

Antioxidant 1076

CAS No. 2082-79-3

Specifications:

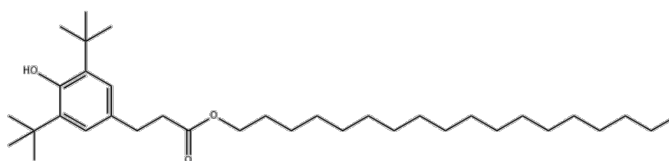

Tests	Specification
Appearance	White powder
Assay	≥98.5%
Melting point	50.0~55.0°C
Solubility	Clear
Transmittance@425nm	≥98.0%
Transmittance@500nm	≥99.0%
Ash	≤0.05%
Volatile	≤0.20%

Package: 20Kg/Bag or 20Kg/Carton

Application:

- LANOX-1076, with good synergistic of LANOX-168, DLTDP, can retard heated degradation and oxidative degradation of polymer substances during processing and in end application. It can be widely used for PE, PP, POM, ABS resin and other compound resin, compound rubber and petrochemical products. The dosage is recommended to be 0.1~0.5%.

Storage: Keep container tightly closed in a dry and well-ventilated place.

Recommend Shelf Life: 12 months.