



LANSORB UV-292

Light Stabilizer 292

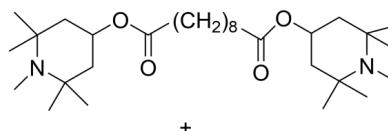

CAS No. 1065336-91-5



Specifications:

Tests	Specification
Appearance	Colorless to light-yellow transparent liquid
Monoester	17.0~23.0%
Diesters	73.0~79.0%
Color	≤ 50
Light transmittance (425nm)	≥ 95.0%
Light transmittance (450nm)	≥ 95.0%
Light transmittance (500nm)	≥ 98.0%
Loss on drying	≤ 0.5%
Ash	≤ 0.1%
Moisture	≤ 0.5%

Package: 25Kg/Drum

Application:

- The product is suitable for polyurethanes, flexible PVC, styrenic polymers (ABS, ASA), acrylics, unsaturated polyesters, elastomers, adhesives, and sealants. It is effective in both water- and solvent-based coating systems. It is also ideal for use in plastisols and liquid master batches for plastics.

Storage: Keep container tightly closed in a dry and well-ventilated place.



Recommend Shelf Life: 12 months.