


# LANSORB UV-360

## UV Absorber 360

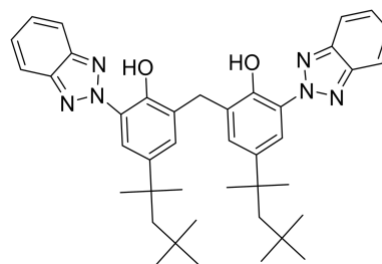

CAS No. 103597-45-1

### Specifications:

Tests	Specification
Appearance	Off-white powder
Assay	≥98.0%
Melting range	195.0~198.0℃
Light transmittance (460nm)	≥97.0%
Light transmittance (500nm)	≥98.0%
Loss on drying	≤0.30%
Ash	≤0.05%

**Package:** 20Kg/Carton or 25Kg/Carton

### Application:

- The product is mainly used in acrylate, polyester, polycarbonate, polyamide, polyformaldehyde, polyolefin, styrene polymers, elastomers, adhesives, etc. It can be used with other light stabilizers or antioxidants.

**Storage:** Keep container tightly closed in a dry and well-ventilated place.

**Recommend Shelf Life:** 24 months.