


LANSORB UV-622

Light Stabilizer 622

CAS No. 65447-77-0

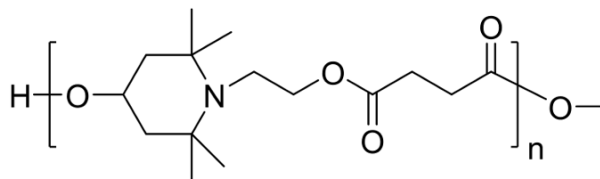

Specifications:

Tests	Specification
Appearance	White particles or powder
Melting point	≥55°C
Heating decrement	≤0.50%
Ash	≤0.10%
Light transmittance (425nm)	≥97.5%
Light transmittance (500nm)	≥98.0%

Package: 25Kg/Carton

Application:

- The product is particularly usefully in PE applications (injection molding, rotational molding, film, and tape), EVA, PP fibers, polyurethanes, polyacetals, polyamide, elastomers, adhesives etc. It is usually used in combination with antioxidants, UV absorbers to optimize performance in outdoor use.

Storage: Keep container tightly closed in a dry and well-ventilated place.

Recommend Shelf Life: 24 months.