


LANSORB UV-770

Light Stabilizer 770

CAS No. 52829-07-9

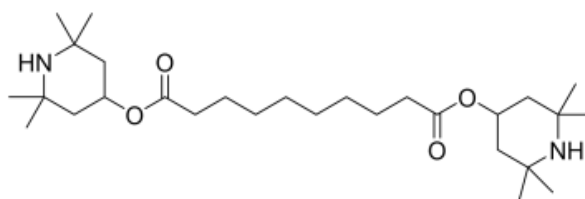

Specifications:

Tests	Specification
Appearance	White powder or granules
Assay	≥99.0%
Melting point	81~86°C
Heating decrement	≤0.50%
Ash	≤0.10%
Light transmittance (425nm)	≥98.0%
Light transmittance (500nm)	≥99.0%

Package: 25Kg/Carton

Application:

- The product is suitable for polypropylene, impact modified PP (TPO), EPDM, polystyrene, impact polystyrene, ABS, SAN, ASA, polyurethanes, and is also effective in polyamides and polyacetals. It can often be used with other light stabilizers, antioxidants and UV absorbers, to further improve the anti-aging effect of materials.

Storage: Keep container tightly closed in a dry and well-ventilated place.



Recommend Shelf Life: 24 months.