


LANSORB UV-P

UV Absorber P

CAS No. 2440-22-4

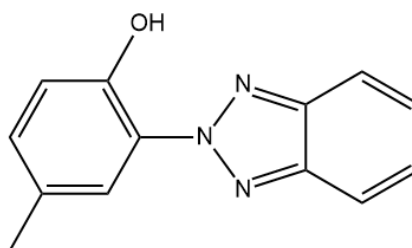

Specifications:

Tests	Specification
Appearance	White to yellowish crystalline powder or crystal
Assay	≥99.0%
Melting Point	128~133 °C
Ash	≤0.1%
Loss on Drying	≤0.5%
Transmittance (440nm)	≥95%
Transmittance (500nm)	≥97%

Package: 25Kg/Carton

Application:

- This product is a high efficient UV absorber, which can effectively absorb 270~380 nm UV light.
- Odorless, good thermos-stability under high temperature.
- Non-flammable, non-explosive, non-toxic, harmless to health.
- This product almost does not absorb visible light, particularly applicable to colorless and light-colored products.
- Mainly applied to PVC, PS, PMMA, AS resin, ABS resin, PPPE, etc.

Storage: Keep away from open flames, hot surfaces and sources of ignition. Keep container tightly closed.

Recommend Shelf Life: 12 months.